

INSTRUCTION MANUAL

Mobile compact LED light

TPFL18V9000LMHB

**IMPORTANT! RETAIN FOR FUTURE REFERENCE:
READ CAREFULLY!**

Technical specifications

Indoor/outdoor use	Indoor and outdoor
Protection class	II
Type of protection	IP54
Impact resistance	IK08
Operating temperature	-10°C ~ +40°C
Illuminant	92W, LED
Luminous flux	9000lm (3x 3000lm, 50%-100% 2 steps)
Color temperature	5700K
Nominal voltage	220-240V~ 50/60Hz
Operating time	Approx. 15 min./1.5Ah@100%, 30 min./1.5Ah@50%
Battery	Li-ion 18V (not included)
Dimensions	1138 x 193 x 153 mm
Net weight	4100g (exclude cable)

Proper intended use

The LED light is suitable for indoor and outdoor lighting applications. Press the on/off switch to choose desired stage: 100% Power – 50% Power.


Maintenance

Please note: for non-user replaceable light sources

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Never open the lamp when the mains supply cable is connected.

Cleaning

Do not use solvents, corrosive cleaners or the like. Use a dry or slightly moist cloth for cleaning **only**.

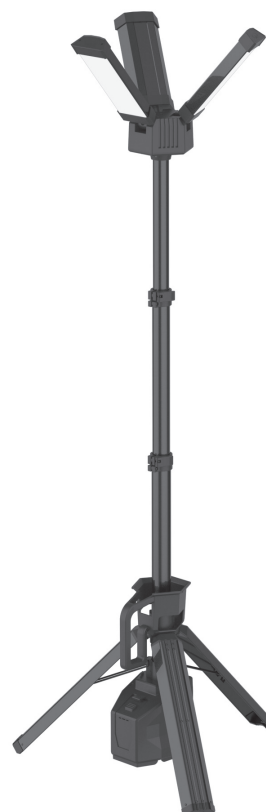

Safety information

1. Prior to commissioning, make sure the right voltage is available.
2. Prior to each charge, make sure the light and mains supply cable are not damaged in any way. Never use the lamp if you find damage.
3. Do not use the handlamp in explosive environments in which flammable liquids, gases or dusts are present. **Risk to life!**
4. LED lights are extremely bright. Do not look directly at the lamp.

Disposal

Dispose of electrical devices in an environmentally responsible manner!

Do not dispose of electrical devices with household rubbish. In accordance with European Directive 2012/19/EU regarding electrical and electronic devices must be collected separately and sent in for recycling. Please contact your local authorities for available disposal options for your worn-out device.



BME Group Sourcing B.V.
Walaardt Sacréstraat 405
1117BM Schiphol
The Netherlands

www.bme-group.com